


CELIDO Cumulos 2:2 eco / 4:2 eco



Ceiling suspensions for AKUSTIX Vario elements for many applications

- ✓ For all **AKUSTIX** Vario eco elements with a thickness of 12 mm
- ✓ Flexibly adjustable in height and angle of inclination - ideal for any locations
- ✓ Three different ceiling fixations included
- ✓ Other suspension cable lengths available as accessories

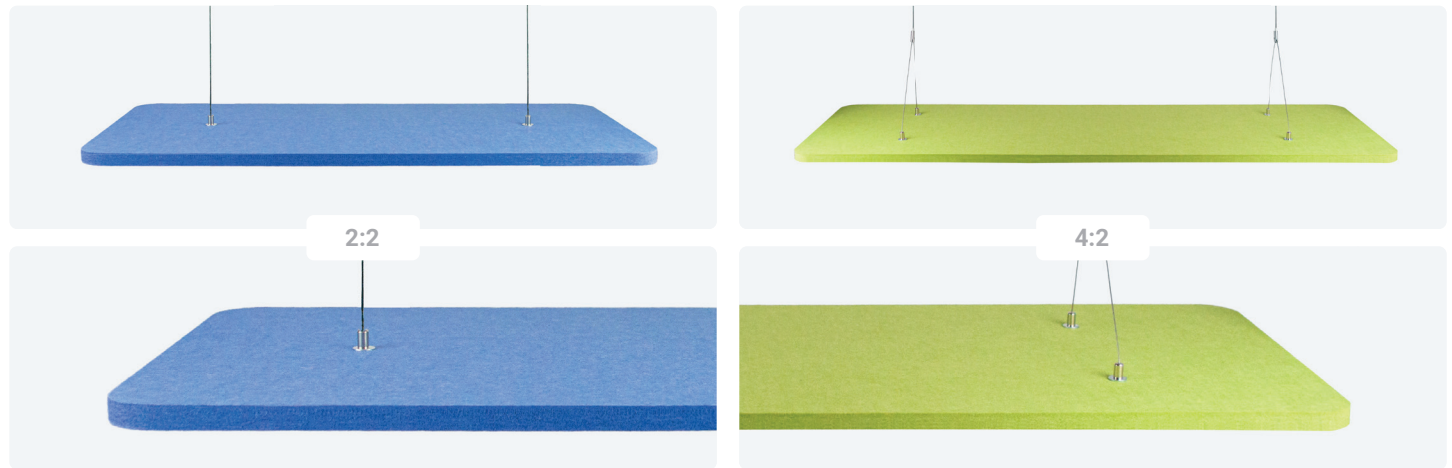

Details


Standard cable length	1000 mm
Optional cable length	1500 / 3000 mm



Ceiling fixing:
CELIDO C for grid ceilings



Technical drawings

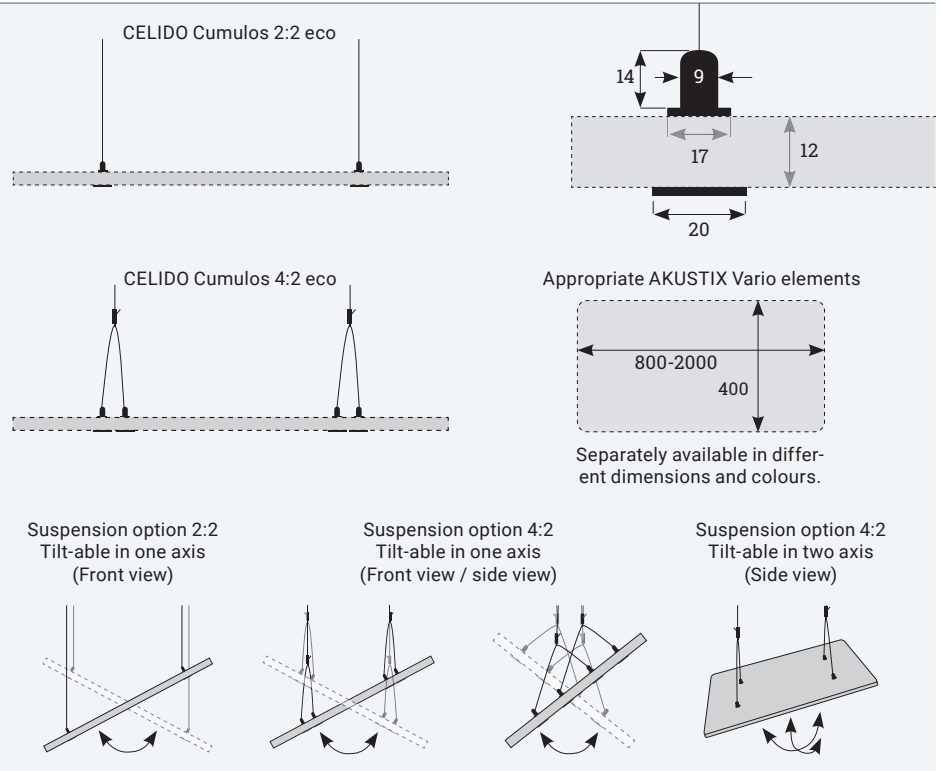

AKUSTIX elements as show in the pictures are not included. The recommended number of fixation sets varies based on the width of the AKUSTIX Vario elements. Recommendation: Panel fixation every 400 mm

Article	PU	Description	Type	Item No.
CELIDO Cumulos 2:2	2	Double wire suspension for AKUSTIX Vario: Cumulos eco (12 mm); 2 fixing points (Panel) / 2 fixing point (ceiling)	Connection ceiling/panel	308 126306
CELIDO Cumulos 4:2	2	Double wire suspension for AKUSTIX Vario: Cumulos eco (12 mm); 4 fixing points (Panel) / 2 fixing point (ceiling)	Connection ceiling/panel	308 126299
CELIDO Cumulos 1500	2	Suspension extension for AKUSTIX Vario set: Cumulos (eco)	Extension ceiling/panel	308 124717
CELIDO Cumulos 3000	2	Suspension extension for AKUSTIX Vario set: Cumulos (eco)	Extension ceiling/panel	308 124059
CELIDO C	1	T-bar clip for ceiling fixation	Ceiling fixation	308 127055

