

UPLIGHT Clip.2

Intelligent office light for tabletop mounting, glare free



- ✓ Biodynamic light HCL
 - ✓ Automatic, daytime-dependent, light temperature control possible
 - ✓ Glare-free UGR ≤ 6 beam angle: 50°/110°
 - ✓ Distance sensor / daylight sensor
- ✓ Presence sensor
 - ✓ >50.000 h working lifetime
 - ✓ Dimmable by touch
 - ✓ Flicker-free
 - ✓ Complies with Directive (EU) 2024/1799

CRI

>80

h

>50.000

3000 K

4000 K

5000 K

6000 K

UGR




<6

lm

11200



Details	
Light source	LED
Lighting effect	140 lm/W
Protection level	IP20
UGR	<6
CRI (Ra>)	≥80
Luminous flux	11200 lm
Luminous ratio	top 70%, bottom 30%
Beam angle	top 110°, bottom 50°
Light color	3000k - 6000k
Energy consumption	max. 80 W
Standby	0,5 W
Input voltage	AC 220-240V
Power factor	>0,9
Working lifetime (hour)	>50.000 h
Working temperatur	-20° - +45°
Cable length	300 cm

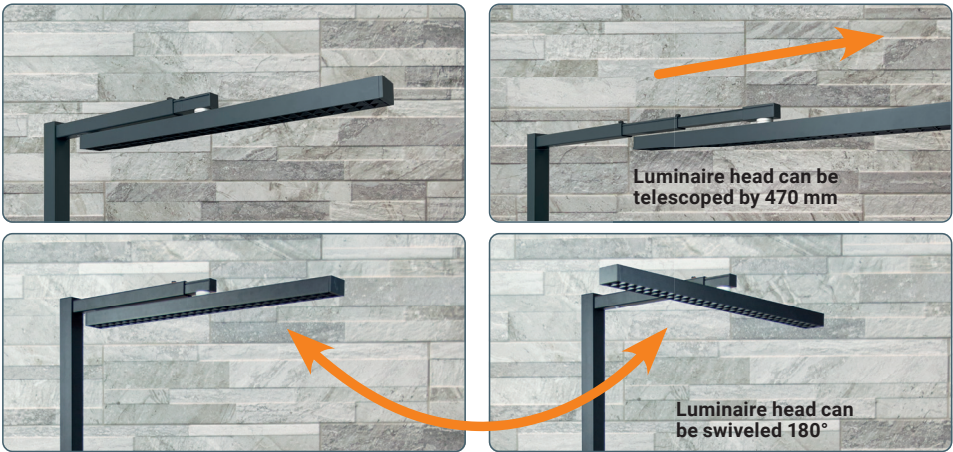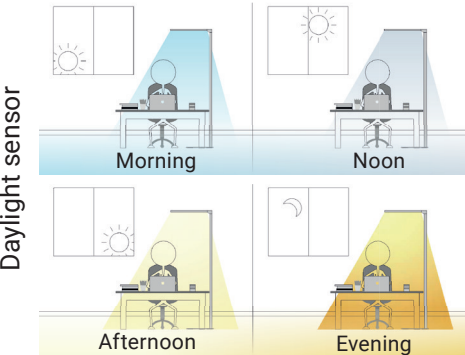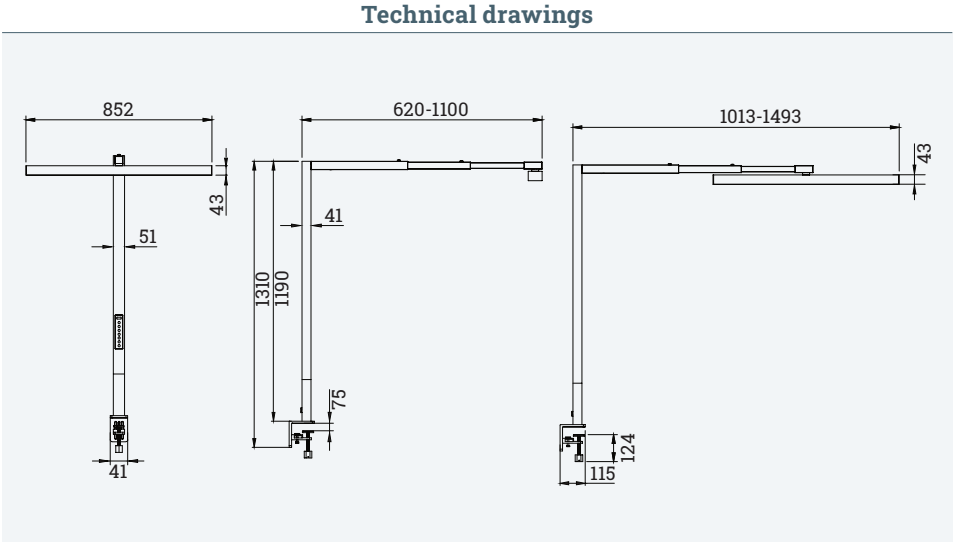

Article	Description	Colour	Item No.
UPLIGHT Clip.2	Intelligent Office Clip Light, Biodynamic office lighting, glare free	Black	331 136344
		Anthracite	331 136337
		White aluminium	331 136351
		White	331 136358

