


UPLIGHT Fit.2

Intelligent office light for fitting in the tabletop, glare free (Ø80 mm)






- ✓ Biodynamic light HCL
- ✓ Automatic, daytime-dependent, light temperature control possible
- ✓ Glare-free UGR ≤ 6 beam angle: 50°/110°
- ✓ Distance sensor / daylight sensor
- ✓ Presence sensor
- ✓ >50.000 h working lifetime
- ✓ Dimmable by touch
- ✓ Flicker-free
- ✓ Complies with Directive (EU) 2024/1799

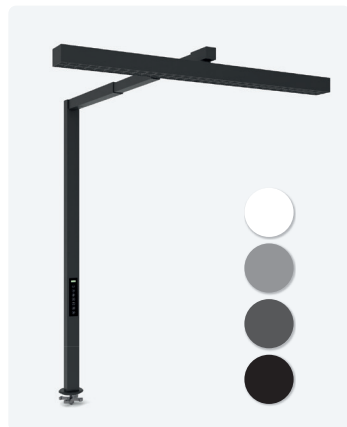

Details

Light source	LED
Lighting effect	140 lm/W
Protection level	IP20
UGR	<6
CRI (Ra>)	≥80
Luminous flux	11200 lm
Luminous ratio	top 70%, bottom 30%
Beam angle	top 110°, bottom 50°
Light color	3000k - 6000k
Energy consumption	max. 80 W
Standby	0,5 W
Input voltage	AC 220-240V
Power factor	>0,9
Working lifetime (hour)	>50.000 h
Working temperatur	-20° - +45°
Cable length	300 cm

Technical drawings

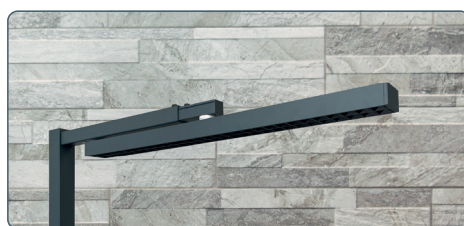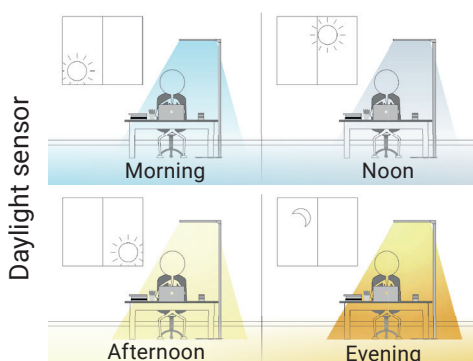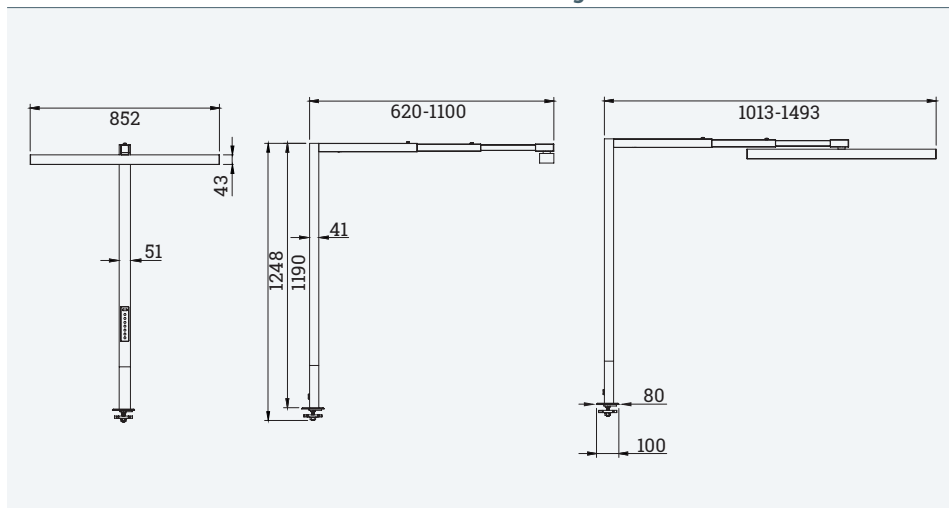

Article	Description	Colour	Item No.
UPLIGHT Fit.2	Intelligent Office Desk-Fitted Light, Biodynamic office lighting, glare free	Black	331 136407
		Anthracite	331 136400
		White aluminium	331 136414
		White	331 136421

