


Intelligent office light


- ✓ UGR ≤ 19, beam angle 90°/110°
- ✓ Light temperature 4000K
- ✓ >50.000 h working lifetime
- ✓ Dimmable by touch
- ✓ Flicker-free

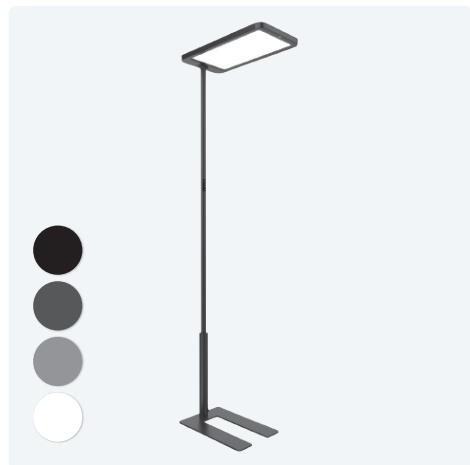

Details

Light source	LED
Lighting effect	130 lm/W
Protection level	IP 20
UGR	<19
CRI (Ra>)	≥80
Luminous flux in total (top/bottom)	10.400 lm (7400 / 3000 lm)
Luminous ration	70/30% top/bottom
Beam angle	top 110°, bottom 90°
Light temperature	4000 K
Energy consumption	max. 80 W
Standby	0,5 W
Input voltage	AC 220-240 V
Power factor	>0,9 W
Working lifetime (h)	>50.000 h
Working temperature	-20° to +45°
Cable length	3,0 m

Technical drawings

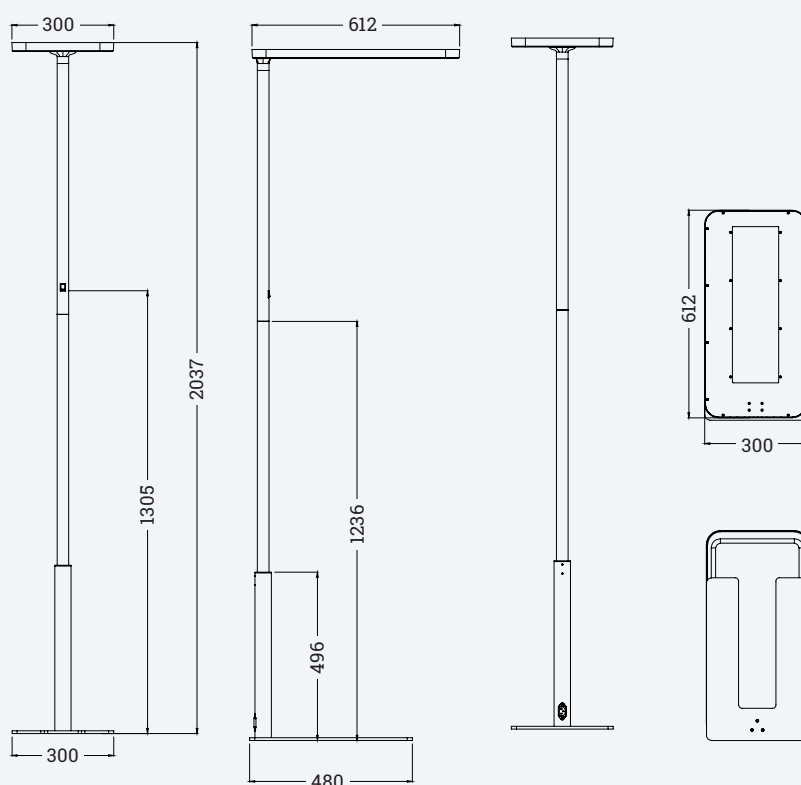

Black & silver upon request

Article	Description	Colour	Item No.
SMARTLIGHT One	Intelligent floor lamp, biodynamic office lighting	Anthracite	331 137128
		White	331 136379